




ILUMINACIÓN EXTERIOR

LÍNEA PROYECTOR LED A PRUEBA DE EXPLOSIÓN

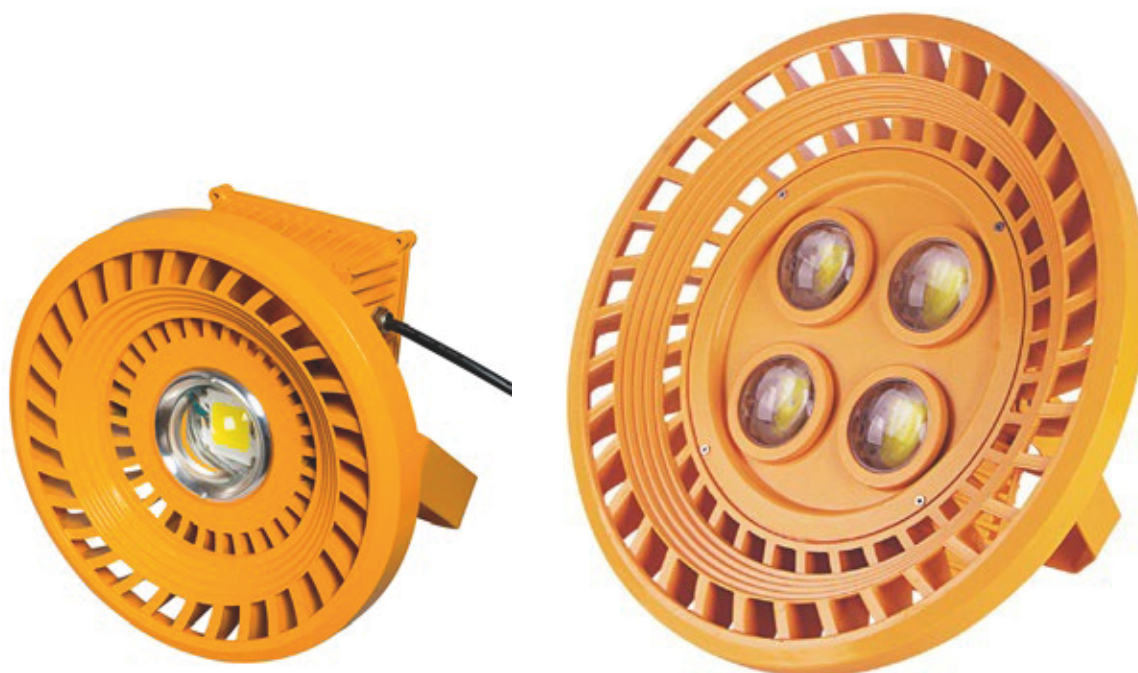

100W



150W



200W



POTENCIA	TECNOLOGÍA	VOLTAJE	EFICIENCIA LUMÍNICA	AUTONOMÍA	CRI	DIMENSIONES	PESO	FACTOR POTENCIA
100W	LED SMD Bridgelux	AC85-265V 50Hz/60Hz	130 Lm/W	13.000 Lm.	>70	300*130 mm	4 Kg.	>0.95
150W	LED Bridgelux 3030	AC85-265V 50Hz/60Hz	130 Lm/W	19.500 Lm	>70	405*115 mm.	6,7 Kg.	>0.95
200W	LED Bridgelux 3030	AC85-265V 50Hz/60Hz	130 Lm/W	26.000 Lm.	>70	430*180 mm.	8 Kg.	>0.95



CERTIFICADO

 150008220691		 中国认可 检测 TESTING CNAS L1016	
Conformity Certificate of Explosion-proof Product (No. 8161289) Ex			
Name of unit	Wei Fang ZHONG SHENG Lighting Energy-Saving Services CO., LTD		
Address	Room608, GaoXing Building, Noth of YuQing st and West of ZHong Xin Ci Gan rd, Wei Fang High-Tech District		
Type and specification	BLED60	AC220V 400W	
Name of Product	EX-Proof LED Lamp	Ex marking	ExdembIICT4Gb ExtDA21 IP65 T95 °C
Production standard	Q/ZS001-2016	No.of drawing	BLED60-00
Remark	1. Production is already including Ex component for LED driver, 2. On behalf of: LED light source ,Power ≤ 400W		

The examination and sample test for above-mentioned the product drawing and technical documents are up to the following standards:
GB3836.1 — 2010、GB3836.2 — 2010、GB3836.3 — 2010、GB3836.9 — 2014、
GB12476.1 — 2013、GB12476.5 — 2013、

Term of validity:march.31,2022

Approved by: qi zhuo xin

Low Voltage Explosion-Proof Electrical Apparatus Product Quality
Supervision and Test Centre of Engineering Industry
Date of Issue: April. 1, 2017